




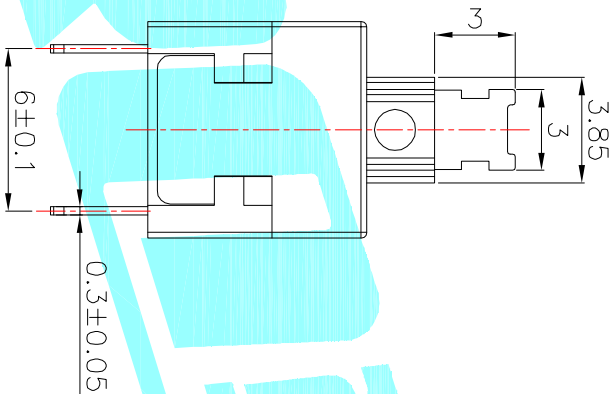
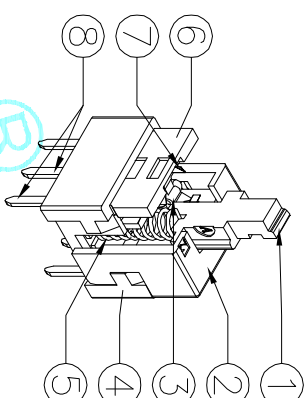


NOTE:
 1. Operating Force: 180gf±50gf
 2. Travel : 2.4±0.3mm



Circuit Diagram



PCB Layout(Pattern Side)

NO.	Operating Type	Part No.	Base Colour	Cover Colour	Knob Colour
1	Push To Lock	K8-8081D-L1	Black	White	Blue
2	Push No Lock	K8-8081D-N1	White	Black	Black
3	Push No Sound No Lock	K8-8081D-NN	White	Black	White

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑧	Terminal	---	6	Brass strip	Plating silver	---
⑦	Contact	---	2	Phosphor bronze	Plating silver	---
⑥	Securing glue	---	2	PA66	Black	---
⑤	Spring	---	1	SUS	Natural	---
④	Base	---	1	PBT	Black	---
③	Crochet Needle	---	1	SUS	Natural	---
②	Cover	---	1	POM	White	---
①	KNOB	---	1	POM	Blue	---

APPROVALS	DATE	TITLE:
DRAWN J.X.Zhong	2013/10/14	ELECTRONICS CO.,LTD
CHECKED		PUSHBUTTON SWITCHES

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:
	A		NEW				30~12±0.30	±0.30	mm	1:1	PROJ: 1 OF 1
							10~30 ±0.20	±0.15			
							5~10 ±0.10	±0.10			
							~5 ±0.10	±0.10			