
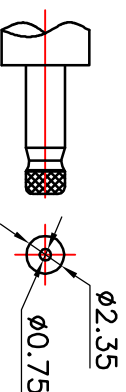


P.C.B LAYOUT(Copper-side view)

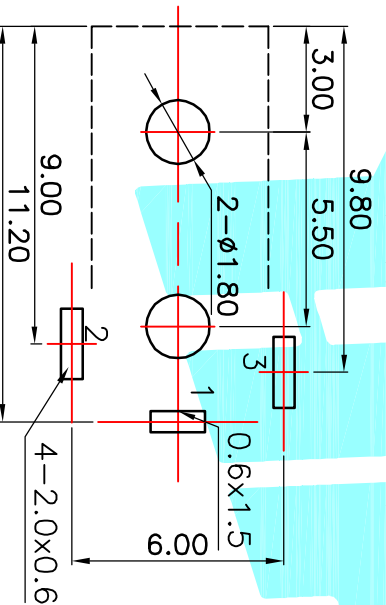

DC MATE PLUG

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

②	Terminal	3	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				

DRAWN J.X.Zhang 2013/11/11

TITLE: PHONE JACKES



ELECTRONICS CO.,LTD

CHECKED

PART NO. DC-011

APPROVALS		PART NO.		SCALE: 1:1		PROJ. SHEET 1 OF 1	
TOLERANCES ARE	30 ^{±0.15}	±0.30	ANGLE	UNIT: mm			
	10 ^{±0.10}	±0.20					
	5 ^{±0.10}	±0.15	±Z	DRAWING NO.			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			