



PCB layout (Pattern Side)

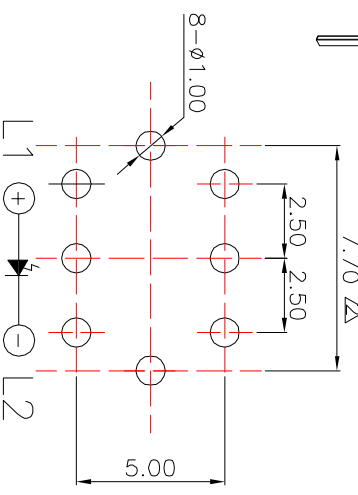

电路图



Color	VR	IF	Recommended Operating	IF(Nom)	IF(Max)
White	DC5V 20mA	20mA	3.0V	3.0V	3.6V
Red	DC5V 20mA	20mA	1.7V	2.4V	2.4V
Yellow	DC5V 20mA	20mA	1.9V	2.4V	2.4V
Blue	DC5V 20mA	20mA	3.0V	3.0V	3.6V
Green	DC5V 20mA	20mA	1.9V	1.9V	2.4V

LED colour (LED颜色)	Part No. (料号)
Whiter(白色)	K6-6131D01-□□
Red(红色)	K6-6131D02-□□
Blue(蓝色)	K6-6131D03-□□
Green(绿色)	K6-6131D04-□□
Yellow(黄色)	K6-6131D05-□□

NO.	Operating Type	Part No.
1	Push To Lock (自锁)	K6-6131D□□-L1
2	Push No Lock (无锁)	K6-6131D□□-N1

② Terminal	3	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM PART NAME	TERN.O.	QTY.	MATERIAL FINISHING
APPROVALS	DATE		

DRAWN J.X.Zhong 2013/11/11  
**OKHRO**  
 ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	C					
	B					
	A		NEW			

CHECKED		TITLE:	
APPROVALS		PART NO.	K6-6131D□□-□□
TOLERANCES ARE	30~12.5 ±0.30	ANGLE	
	10~30 ±0.20	UNIT:	mm
	5~10 ±0.15	SCALE:	1:1
	~5 ±0.10	DRAWING NO.	

APPROVALS	DATE	REMARK