
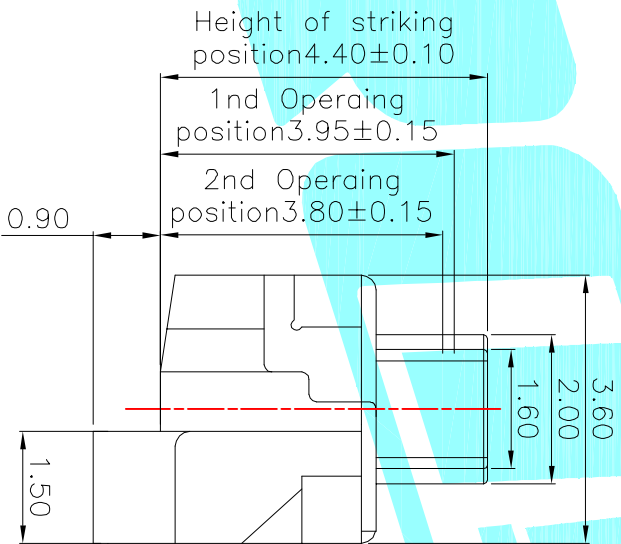


Circuit diagram

Typical Specifications :

1. Rating : DC 12V 50mA
2. Operating force: 1st 60±30gf
2st 250±50gf
3. Travel: 1st 0.45mm 2st 0.15mm
4. Life:100,000 Cycles Min.

PCB Layout(Pattern side)

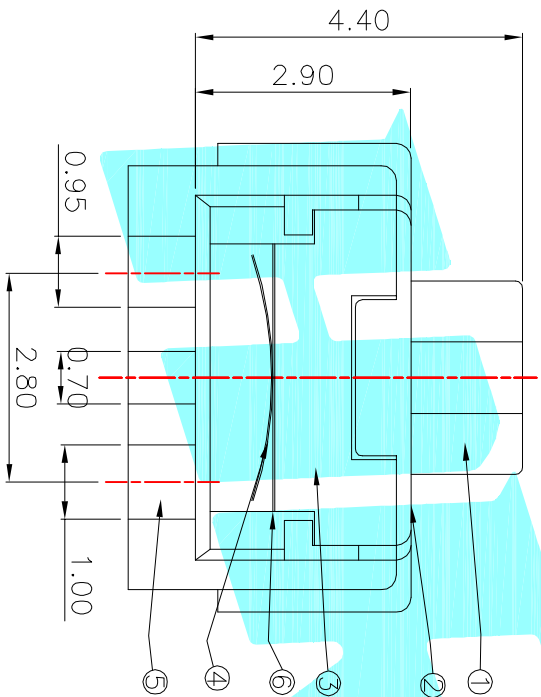

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
⑦	Silicone shell	---	1	Silicone	---	---
⑥	Dust cover	---	1	KAPTON FILM	---	---
⑤	Terminal	---	3	Phosphor Bronze Plating silver	---	---
④	Contact	---	1	F.Ag/SUS	---	---
③	Base	---	1	LCP	Black	---
②	Cover	---	1	SUS	---	---
①	Keystroke	---	1	Nylon	WHITE	---

APPROVALS		DATE
DRAWN	JIANKUN.LIU	2015.5.19

TITLE: TACT SWITCHES
PART NO. K2-1826FS

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
---	A	---	NEW	---	---	---

TOLERANCES ARE	30~12.5	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
10~30	±0.20					
5~10	±0.15					
~5	±0.10					



ELECTRONICS CO.,LTD