


P.C.B LAYOUT(copper-sided view)
9.60

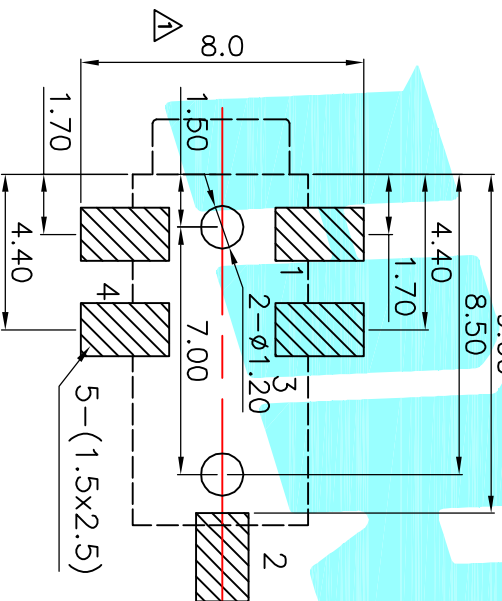

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

Model No.	PJ-227-A	PJ-227-B
Schematic		
Model No.	PJ-227-C	PJ-227-D
Schematic		

② Terminal	5	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TERN.O.	QTY.
APPROVALS		DATE	
DRAWN	J.X.Zhang	2016/6/23	
CHECKED			
APPROVALS		TITLE:	PHONE JACKES
TOLERANCES ARE		PART NO.	PJ-227
30 [±] 0.15	±0.30	SCALE:	1:1
10 [±] 0.20	±0.20	UNIT:	mm
5 [±] 0.10	±0.15	ANGLE	±2°
~ 5	±0.10	DRAWING NO.	

OKHRO
 ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	B					
	A		NEW			