


P.C.B LAYOUT(copper-sided view)

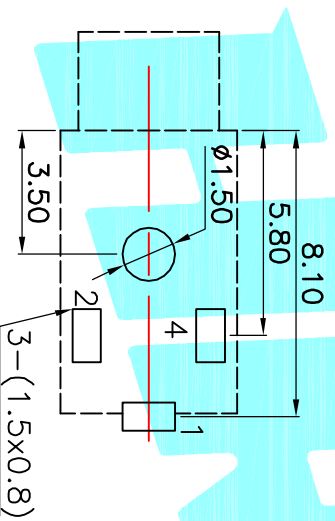

Model NO	A=φ4 A=φ5	PJ-2100 PJ-2100A
Schematic		

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

DRAWN		J.X.Zhang	DATE		2013/11/11	TITLE:		PHONE JACKES	
CHECKED			APPROVALS			PART NO.		PJ-2100	
APPROVALS			APPROVALS			SCALE:		1:1	
TOLERANCES ARE		30 <sup>±</sup> 0.15	±0.30	ANGLE		DRAWING NO.		PROJ. SHEET 1 OF 1	
		10 <sup>±</sup> 0.10	±0.20			DRAWING NO.			
		5 <sup>±</sup> 0.10	±0.15	±2'		DRAWING NO.			
		~ 5	±0.10			DRAWING NO.			
ECN NO.		REV.	DATE.			DESCRIPTION.		NEW	
A						CHANGE.		CHECK.	
						APPRO.			

**OKHRO**  
 ELECTRONICS CO.,LTD